



# HIGH RESOLUTION FREQUENCY-DOMAIN EM SURVEYS

Sander Geophysics has sixty years of worldwide experience in high resolution airborne surveys and flew its first electromagnetic (EM) survey in 1958. SGL offers frequency-domain electromagnetic (FEM) surveys using a fixed-wing aircraft. FEM systems generate electromagnetic fields (primary field) which in turn induce secondary EM fields that vary in amplitude and phase depending on the electrical conductivity of the medium. At SGL, this secondary field is measured by the receiver coils and then separated into two components: the in-phase (or real) component which is in-phase with the primary field and the quadrature (or imaginary) component which is 90° out-of-phase with the primary field. The relationship between the signal strengths of the two components is then used to estimate the conductivity and depth of measured anomalies. This system can be used for both mineral exploration and environmental programs to:


- map lateral changes in geological conditions such as changes in lithology and structure, as well as presence of ore bodies;
- perform groundwater investigations;
- detect large buried metal objects.

## AIRBORNE FREQUENCY-DOMAIN EM SURVEYS AT SGL

SGL's de Havilland DHC-6 Twin Otter can be configured with a four-frequency wingtip mounted EM system (SGFEM). This configuration results in a large transmitter-receiver coil separation which improves the signal to noise ratio. This allows surveys to be flown higher, thus making the system a viable option for surveying in areas where local regulations restrict minimal flying altitudes.



SGL's de Havilland Twin Otter on survey in Ireland

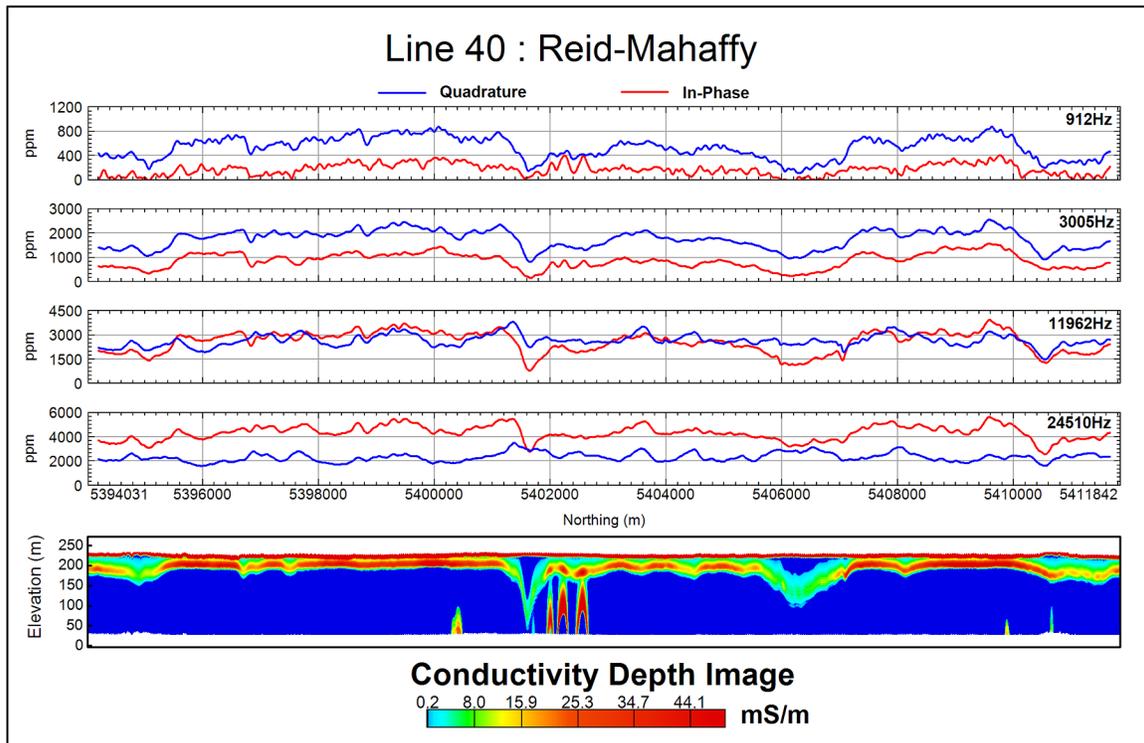

Test line over the Reid-Mahaffy test site in Ontario showcasing all electromagnetic components in profile plus CDI generated from all SGFEM frequencies. The targets of interest can be seen in the centre of the CDI along with the overburden across the entire length of the line.

The transmitter–receiver coil pairs are mounted in a vertical–coplanar orientation, which reduces noise by minimizing coupling with the wingtip surface. Additionally, the coils in any one set (transmitter or receiver) are axially offset and are kept adequately separated from each other. The system also comes equipped with a 50/60 Hz power line monitor which becomes particularly useful in identifying cultural interference when surveying in urban settings. Other ancillary equipment includes radar and laser altimeters, and a real–time digital video recording system.

Other geophysical survey methods may also be employed simultaneously with EM data acquisition. High resolution aeromagnetic data can be gathered in conjunction with this EM system. The cesium magnetometer sensor is mounted in a stinger attached to the tail of the aircraft. The Twin Otter can also be fitted with gamma ray detectors for radiometric surveying with a detector volume tailored to fit the survey program objectives. SGL operates the well known and proven Exploranium GR820 spectrometer as well as the new Radiation Solutions RS–500 spectrometer. Gravity (**AIRGrav**) and methane detection are also compatible with this system configuration.

<b>AIRBORNE INSTRUMENTS</b>					
<b>Electromagnetic System</b>	<b>Frequencies (Hz)</b>	912	3005	11962	24510
	<b>Tx–Rx coil spacing (m)</b>	21.35	21.35	21.38	21.38
	<b>Magnetic moment (Am<sup>2</sup>)</b>	190	127	49	27
<b>Supplementary Systems</b>	<b>Power line monitor (50/60 Hz)</b> <b>Sferics monitor</b>				
<b>Data Acquisition System</b>	<b>Sander Geophysics – SGDAS airborne computer</b> Capable of recording an unlimited number of channels at variable intervals, and digital scrolling chart display of the data. Data are recorded on a vibration tolerant removable drive. The system clock is a quartz time standard automatically synchronized to UTC by the GPS signal to an accuracy of 1 millisecond.				
<b>Video Imaging System</b>	<b>Sander Geophysics – SGLDIS digital video</b>				
		<b>Resolution (m)</b>	<b>Calibrated to</b>	<b>Range (m)</b>	
<b>Laser Altimeter</b>	<b>Riegl LD90–3300VHS–FLP</b>	0.25	<1%	0 to 10,000 (33,000 ft)	
<b>Radar Altimeter</b>	<b>Collins</b>	0.5	1%	0 to 760 (2,500 ft)	
<b>Barometric Altimeter</b>	<b>Honeywell TJE</b>	2.0	+/- 4 m	0 to 10,000 (33,000 ft)	
<b>AVAILABLE INSTRUMENTS FOR SIMULTANEOUS MULTIDISCIPLINARY SURVEYS</b>					
<b>MAGNETICS</b>					
<b>Sensor</b>	<b>Geometrics</b> Strap–down, optically pumped, cesium split beam Sensitivity: 0.005 nT    Sensor noise level: < 0.02 nT    Sampling rate: 10 Hz				
<b>Compensator</b>	<b>Sander Geophysics – AIRComp</b> real–time digital compensation Range: 20,000 to 200,000 nT    Resolution: 0.001 nT    Sampling rate: 160 Hz				
<b>RADIOMETRICS</b>					
<b>Spectrometer</b>	<b>Exploranium GR820 or Radiation Solutions RS–500</b>				
<b>Detector Volume</b>	16.8 to 50.4 litres of downward–looking crystals 4.2 to 12.6 litres of upward–looking crystals				
<b>GRAVITY</b>					
<b>Gravimeter</b>	<b>Sander Geophysics – AIRGrav, Airborne Inertially Referenced Gravimeter</b>				
<b>METHANE</b>					
<b>Analyzer</b>	<b>Sander Geophysics – SGMethane, methane gas sensing system</b>				

v4.0